

Direct Operated Pressure Reducing Valve

Model: DR10DP...4XJ



- ◆ Size 10
- ◆ Maximum working pressure 210 bar
- ◆ Maximum working flow 80 L/min

Contents

Function description, sectional drawing	02
Models and specifications	02
Functional symbols	03
Technical parameters	03
Characteristic curve	04
Component size	05

Features

- 4 pressure ratings
- 2 adjustment elements
rotary knob
internal hexagon screw with
protective cap
- With pressure gauge connection
- Check valve, optional

Any part of this brochure can not be reproduced, edited, copied and disseminated electronically in any way without authorization of Jiayite Hydraulics company. As the product is in constant development and innovation, the information in this brochure is not specific to the special conditions or applicability of a specific industry, thus Jiayite Hydraulics company is not responsible for any incomplete or inaccurate description generated.



Function description, sectional drawing

The DR10DP valve is a 3-way direct operated pressure reducing valve and has relief function of reducing pressure to ensure a stable of the secondary pressure. It is used to reduce the pressure of circuit, the secondary pressure is set via the adjusting element (1).


At rest, the valve is normally open, the fluid can flow freely from port B to port A. The pressure at port A acts on the plunger(9) of compression spring(3) via control line (4). When the pressure in port A exceeds the setting value of the compression spring (3), the control spool (2) moves into the control position and the pressure at port A remains constant. The control oil are supplied internally from port A via the control line (4).

If the pressure at port A continues to increase due to external forces acts on the actuator, the control spool (2) will still move towards the compression spring (3), then the port A is connected to the oil tank via the shoulder (5) at the control spool (2). The sufficient oil flows back to the tank to prevent further pressure increase.

The leakage oil externally drain from the spring chamber (6) via channel T (Y). An optional check valve (7) allows the oil to flow freely from port A to port B.

A pressure gauge connection (8) allows for the control of the secondary pressure. The oil in the spring chamber (6) is drained external to the oil tank via port Y.

An optional check valve (7) allows the oil to flow freely from port A to port P, and the pressure gauge connection (1) is used for secondary pressure monitoring of the valve.

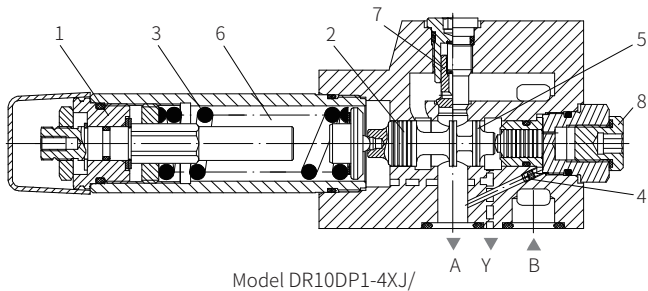


Model DR10DP1-4XJ/

Models and specifications

DR10DP	-	4X	J	/	Y		*
--------	---	----	---	---	---	--	---

direct operated pressure reducing valve size 10	=10						more information in text
adjusting element							sealing material
rotary knob	=1						No code= NBR seals
internal hexagon screw with protective cap	=2						V= FKM seals (consult for other seals)
40 to 49 series (40 to 49 series: installation and connection size unchanged)		=4X					No code= with check valve M= without check valve
Rekith			=J				Y= pilot oil supply internal pilot oil drain external
maximum secondary pressure 25bar					=25		
maximum secondary pressure 75bar					=75		
maximum secondary pressure 150bar					=150		
maximum secondary pressure 210bar					=210		

Functional symbols

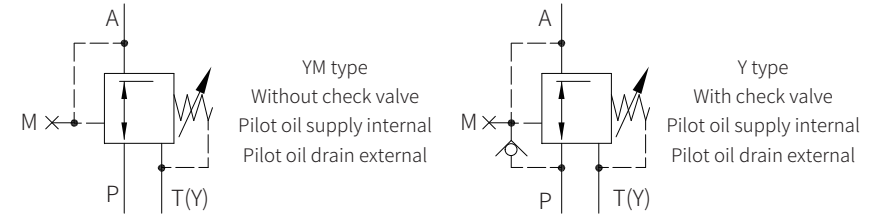

Technical parameters

Installation position		Optional
Environment temperature range	°c	-30 to +50 (NBR seal)
	°c	-20 to +50 (FKM seal)
Weight	Kg	
Hydraulic		
Nominal pressure	bar	210
Maximum working pressure Port B	bar	315
Maximum secondary pressure Port A	bar	25; 75; 150; 210
Maximum backpressure Port Y	bar	160
Maximum flow	L/min	80
Medium		Mineral oil (HL, HLP) ¹⁾ in accordance with DIN51524; Fast living organisms degraded oil according to VDMA 24568; HETG (Rapeseed oil) ¹⁾ ; HEPG (Polyethyleneglycol) ²⁾ ; HEES (Synthetic Fats) ²⁾
Hydraulic oil temperature range	°c	-30 to +80 (NBR seal)
	°c	-20 to +80 (FKM seal)
Viscosity range	mm ² /s	10 to 800
Cleanliness of oil ³⁾		The maximum allowable pollution level of oil is ISO4406 Class 20/18/15



1) For NBR seal and FKM seal.

2) Only for FKM seal.

3) The oil must meet the cleanliness degree requested by the components in the hydraulic system.

Effective oil filtration can prevent failure and increase the service life of the components.

Characteristic curve

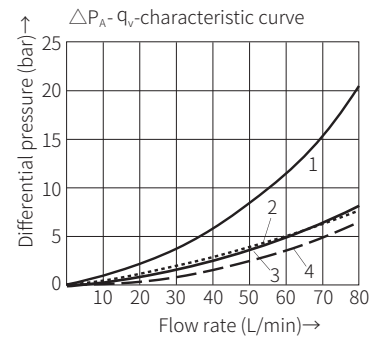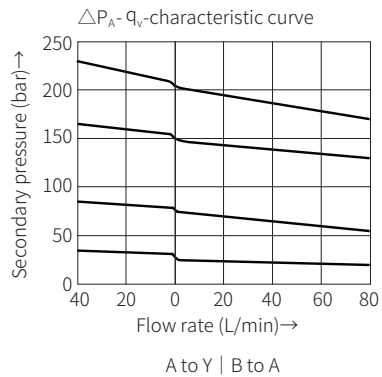(Measured when using HLP46, $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$)**Note:**

When the setting pressure is low, the characteristic curve remains within the corresponding pressure level range.


The characteristic curves are valid for an outlet pressure = 0 over the entire flow range!

- 1 A to Y (minimum pressure differential)
- 2 B to A (minimum pressure differential)
- 3 ΔP only via check valve
- 4 ΔP only via check valve and completely opened control cross-section

Component size

Size unit: mm

Model DR10DP...4XJ/...

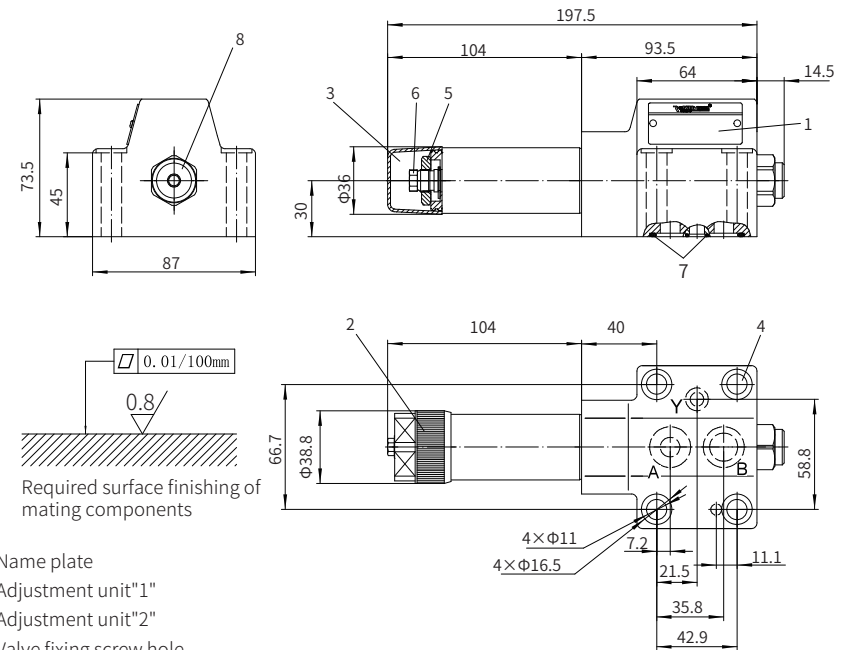

- 1 Name plate
- 2 Adjustment unit "1"
- 3 Adjustment unit "2"
- 4 Valve fixing screw hole
- 5 Locknut S=24
- 6 Internal hexagon adjusting screw S=10
- 7 O ring 17.12x2.62 (for port P, A, B, T)
O ring 8.75x1.8 (for port P, A, B, T)
- 8 Pressure gauge connection: G1/4 or M14x1.5, 12 deep

Valve fixing screw
M10x60-10.9 grade GB/T70.1-2000
Tightening torque $M_A=60\text{Nm}$

It must be ordered separately
if connection subplate is needed.

Subplate type:

- G460/01 (G3/8"); G460/02 (M18x1.5)
- G461/01 (G1/2"); G461/02 (M22x1.5)

