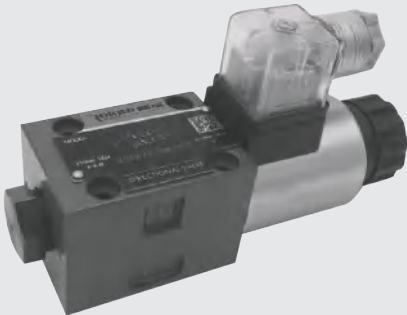


Solenoid Operated Poppet Valve

Model: M-SED6...1XJ

01



- ◆ Size 6
- ◆ Maximum working pressure 350 bar
- ◆ Maximum working flow 25 L/min

Contents

Function description, sectional drawing	02-03
Models and specifications	04
Technical parameters	05-06
Characteristic curve	07
Characteristic limit	08
Component size	09-12
Application examples	13

Features

- Direct operated solenoid directional poppet valve
- Closed port without leakage
- Switching flexibility even in high-pressure state long periods
- Wet-pin DC solenoid with detachable coil (AC voltage available via rectifier)
- The coil can be rotated by 90°
- Replace the coil without opening the pressure chamber
- Individual electrical connection

Function description, sectional drawing

General:

The M-SED6 directional valve is solenoid operated directional poppet valve, it is used to control the opening, closing, and flow direction of oil.

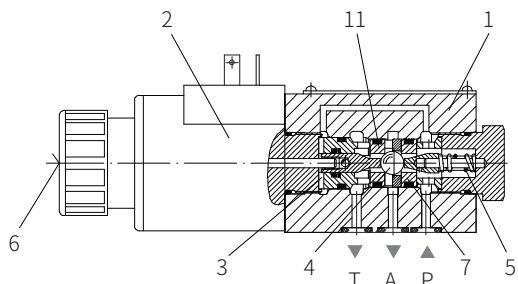
The valve mainly consists of the valve body (1), solenoid (2) and closing element (4). The manual emergency operation (6) can control the valve when the solenoid is not energized.

Basic functions:

The initial position of the valve is determined by the setting of the spring (5). When the power is cut off, the "UK" type valve is opened, while the "CK" type valve is closed. The valve chamber (3) behind the closing element (4) is connected to the port P and sealed against the port T. Therefore, the valve is in a pressure balanced state related to the operating force (solenoid and the spring).



Due to the special closing element (4), the valve can work when the working pressure of ports P, A, and T up to 350bar, and flow in both directions (see symbols)!

In the initial position, the closing element (4) is pressed onto the valve seat (11) by the spring (5), and in the switching position, the solenoid (2) pushes it towards the valve seat (7). That results in a leak-free seal.




Model M-3SED6UK...1XJ/

Symbol "UK"



Model M-3SED6CK...1XJ/

Symbol "CK"



Function description, sectional drawing

To install a sandwich plate, the plus-1 plate under the 3/2-way directional poppet valve, then it can be used as a 4/2-way directional poppet valve.

Function of plus-1 plate:

Initial position:

The main valve does not work. The spring (5) holds the closing member (4) on the valve seat (11). The port P is closed, and port A is connected to port T. In addition, there is a control line over a large area from A to the control piston (8), which unloads to the tank. The pressure oil provided by the oil port P pushes the ball (9) to the valve seat (10), then P is connected to B and A to T.


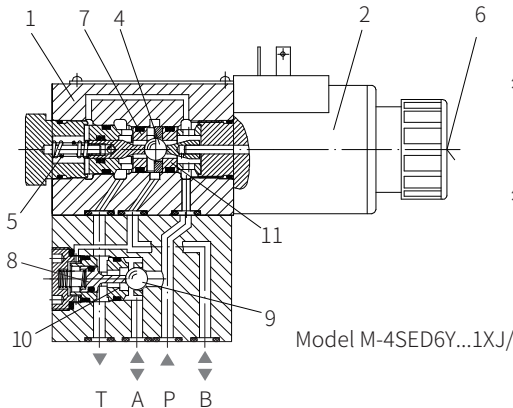
Transition position:

When the main valve is operated, the closing element (4) overcomes the force of the spring (5) and presses on the valve seat (7). Therefore, the oil port T is closed, the ports P, A and B are connected to each other within a short time.

Switching position:

The port P is connected to A. The pressure oil from the pump acts on the large area of the control piston (8) through A, and the ball (9) is pushed to the valve seat (12). Therefore, B is connected to T and P to A. The ball (9) in the plus-1 plate has a "positive cover switching function". In order to avoid a sudden increase of the pressure when using the single rod cylinder, the annular area of the cylinder must be connected to A.

Because of the using of the plus -1 plate and the different arrangement of the valve seat, the following situations may occur.




Cartridge throttle

Due to the working conditions limitations, it may occur that the flow exceeds the performance limit of the valve during the switching process, then the use of a throttle is required.

Example:

- Accumulator operation
- Used as a pilot valve with internal pilot oil supply



3/2-way poppet valve


The throttle is inserted into the port P of the directional valve.

4/2-way poppet valve

The throttle is inserted into the oil port P of the plus-1 plate.

Cartridge check valve

The cartridge check valve allows free flow from P to A and leak-free closure from A to P.







3/2-way poppet valve

The cartridge check valve is inserted into the oil port P of the directional valve.

4/2-way poppet valve

The cartridge check valve is inserted into port P of the plus-1 plate.

Models and specifications

M	—	SED	6	—1X	J	350	C		K4	*
3 working ports	=3									more information
4 working ports	=4									in text
poppet valve										sealing material
size 6	=6									No code= NBR seals
										V= FKM seals
										(consult for other seals)
										No code= without cartridge
										check valve and cartridge throttle
										P= with cartridge check valve
										B12= throttle Ø1.2mm
										B15= throttle Ø1.5mm
										B18= throttle Ø1.8mm
										B20= throttle Ø2.0mm
										B22= throttle Ø2.2mm
										electrical connection
										K4= no insert plug
										Z5L=large right angle lamp plug
										N9= with hidden manual
										emergency operation
										No code= no manual
										emergency operation
Working port	3	4								
functional symbols										
	●	—	= UK							
	●	—	= CK							
	—	●	= D							
	—	●	= Y							
	●	= Available								
10 to 19 series	=1X									
(10 to 19 series installation and connection size unchanged)										
Rekith	=J									
working pressure to 350bar	=350									
wet-pin solenoid with detachable coil	=C									
24VDC	=G24									
205V DC	=G205									

Technical parameters

Overview			
Installation position		Optional	
Environment temperature range°C		-30 to +80 (NBR seal) -20 to +80 (FKM seal)	
Weight	3/2-way valve	kg	1.5
	4/2-way valve	kg	2.3
Hydraulic			
Maximum working pressure		bar	See characteristic limit
Maximum flow		L/min	25
Pressure medium		Mineral oil (HL, HLP) ¹⁾ in accordance with DIN 51524; Fast living organisms degraded oil according to VDMA 24568; HETG (Rapeseed oil) ¹⁾ ; HEPG(Polyethyleneglycol) ²⁾ ; HEES (Synthetic Fats) ²⁾	
Pressure medium temperature °C range		-30 to +80 (NBR seal) -20 to +80 (FKM seal)	
Viscosity range		mm ² /s	2.8 to 500
Cleanliness of oil ⁴⁾		The maximum allowable pollution level of oil is ISO4406 Class 20/18/15	

Technical parameters

Electrical		
Voltage type	DC	AC
Voltage available ³⁾	V 24、205	Only available via rectifier
Allowable voltage tolerance	% ±10	
Power consumption	W 30	
Continuous power on time	% 100	
Switching time to ISO6403	See below table	
Switching frequency	T/h 15000	
Protection type to DIN 40050	IP65 with plug installed and fixed	
Maximum coil temperature	°C 150	

- 1) For NBR and FKM seal
- 2) Only for FKM seal
- 3) The oil must meet the cleanliness degree requested by the components in the hydraulic system.
Effective oil filtration can prevent failure and increase the service life of the components.
- 4) Please inquire for special voltages





Electrical protective conductor(PE ≡) must be connected properly as rules

Switching time t_{ms} (Installation position: Solenoids installed horizontally)

pressure P bar	Flow q _v L/min	DC Solenoid						AC Solenoid+Rectifier					
		Function symbols UK, CK, D, Y						Function symbols UK, CK, D, Y					
		t _{on} No tank pressure				t _{off}		t _{on} No tank pressure				t _{off}	
		U	C	D	Y	U/C	D/Y	U	C	D	Y	U/C	D/Y
70	25	45	40	50	50	10	15	45	40	45	40	40	40
140	25	60	40	50	50	10	15	55	40	55	40	40	40
210	25	60	45	60	50	10	15	60	45	60	45	40	40
280	25	60	45	60	50	10	15	15	45	65	45	40	40
315	25	65	45	65	50	10	15	15	45	65	45	40	40
350	25	65	45	65	50	10	15	15	45	65	45	40	40







Characteristic curve

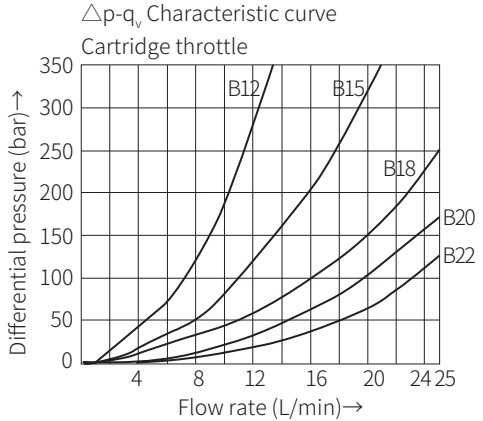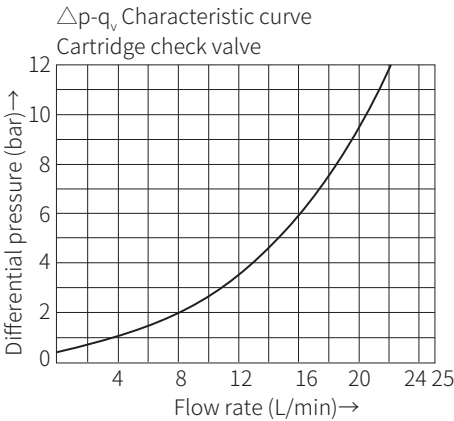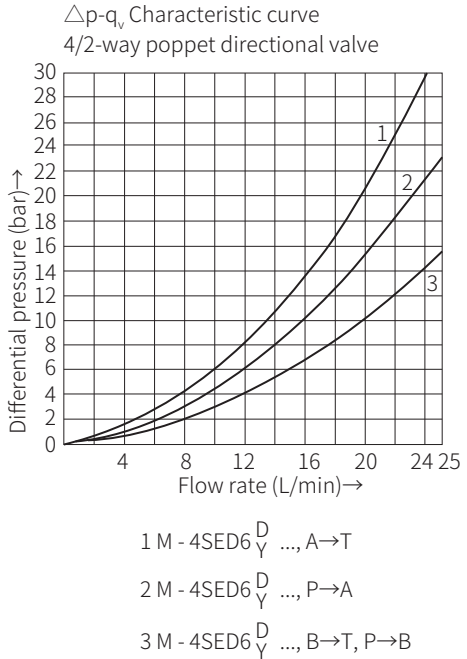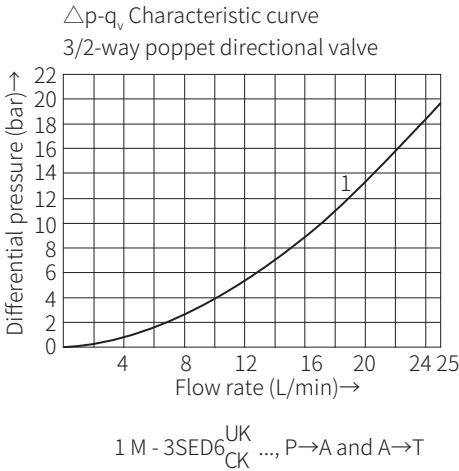(Measured when using HLP46, $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$)



Characteristic limit

(Measured when using HLP46, $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$)


	Functional symbol	comment	Working pressure bar				Flow
			P	A	B	T	
Two-way circuit	"UK" 	The port P or T needs to be blocked by the customer when 2/2-way circuit used!	350	350		350	25
	"CK" 		350	350		350	25
Three-way circuit	"UK" 		350	350		350	25
	"CK" 		350	350		350	25
Four-way circuit (flow only in the direction of the arrow)	"D" 	3/2-way directional valve (model "UK") with plus-1 plate: $P \geq A \geq B \geq T$	350	350	350	P/A/B-40	25
	"Y" 	3/2-way directional valve (model "CK") with plus-1 plate: $P \geq A \geq B \geq T$	350	350	350	P/A/B-40	25

The characteristic limit is measured when the solenoid is at operating temperature, at 10% below the standard voltage and without tank preloading.

Component size

Size unit: mm

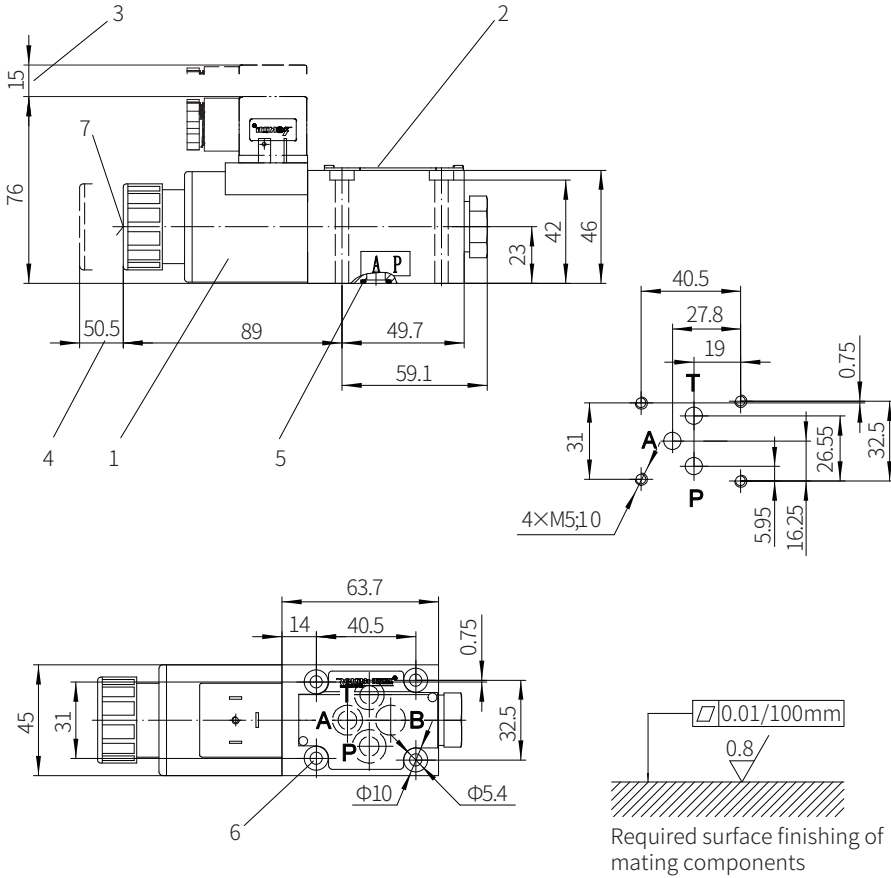3/2-way poppet directional valve, Model "UK"



- 1 Solenoid
- 2 Name plate
- 3 Space required to remove the plug
- 4 Space required to remove solenoid nut
- 5 O-ring 9.25x1.78 (for oil port P, A, B, T)
O-ring 10x2 (for oil port P)
- 6 Screw connection hole
- 7 Hidden emergency button

Valve fixing screw

M5x50-10.9 grade GB/T70.1-2000

Tightening torque $M_A=7.8\text{Nm}$

It must be ordered separately
if connection subplate is needed.

Subplate model:

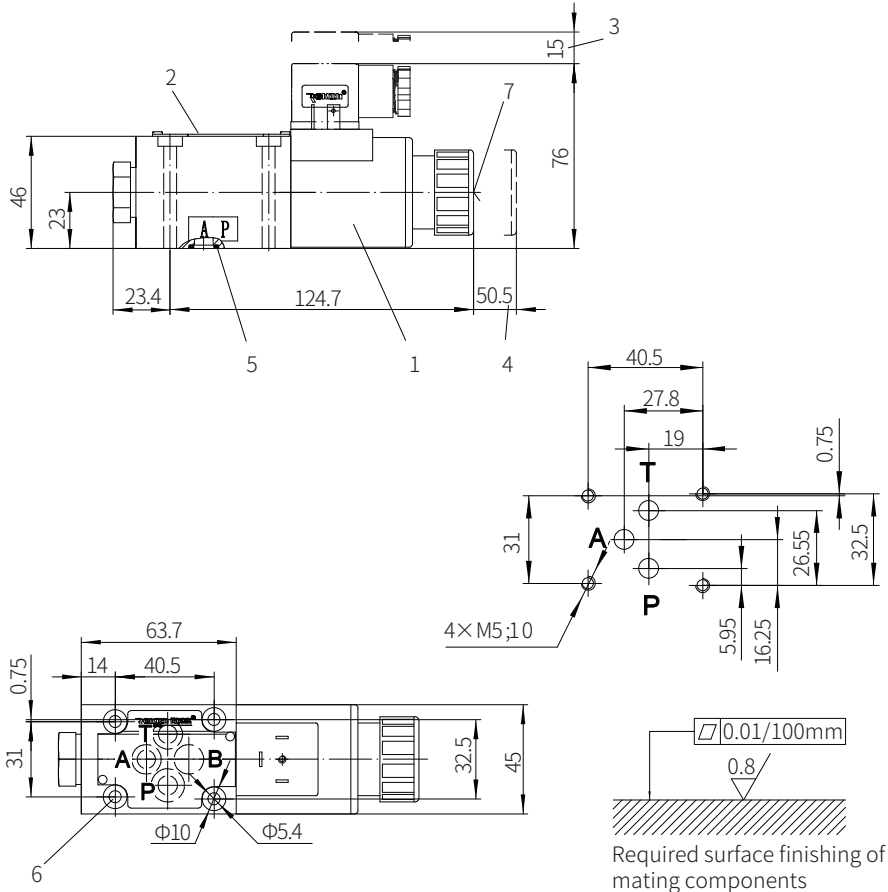
G341/01 (G1/4") ; G341/02 (M14x1.5)

G342/01 (G3/8") ; G342/02 (M18x1.5)

G502/01 (G1/2") ; G502/02 (M22x1.5)

Component size
Size unit: mm

3/2-way poppet directional valve, Model "CK"



- 1 Solenoid
- 2 Name plate
- 3 Space required to remove the plug
- 4 Space required to remove solenoid nut
- 5 O-ring 9.25x1.78 (for oil port P, A, B, T)
O-ring 10x2 (for oil port P)
- 6 Screw connection hole
- 7 Hidden emergency button

Valve fixing screw

M5x50-10.9 grade GB/T70.1-2000

 Tightening torque $M_A=7.8\text{Nm}$

 It must be ordered separately
 if connection subplate is needed.

Subplate model:

G341/01 (G1/4"); G341/02 (M14×1.5)

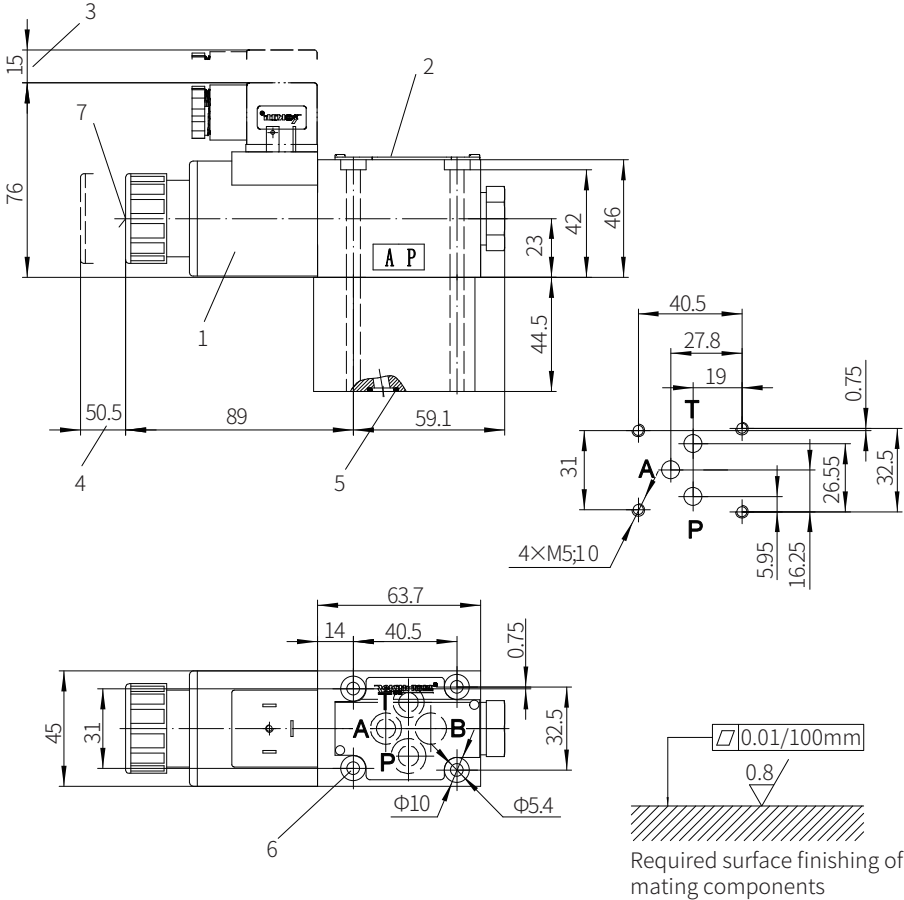
G342/01 (G3/8"); G342/02 (M18×1.5)

G502/01 (G1/2"); G502/02 (M22×1.5)

Component size

Size unit: mm

4/2-way poppet directional valve "D"



01

- 1 Solenoid
- 2 Name plate
- 3 Space required to remove the plug
- 4 Space required to remove solenoid nut
- 5 O-ring 9.25x1.78 (for oil port P, A, B, T)
O-ring 10x2 (for oil port P)
- 6 Screw connection hole
- 7 Hidden emergency button

Valve fixing screw

M5x90-10.9 grade GB/T70.1-2000

Tightening torque $M_A=7.8\text{Nm}$

It must be ordered separately
if connection subplate is needed.
Subplate model:

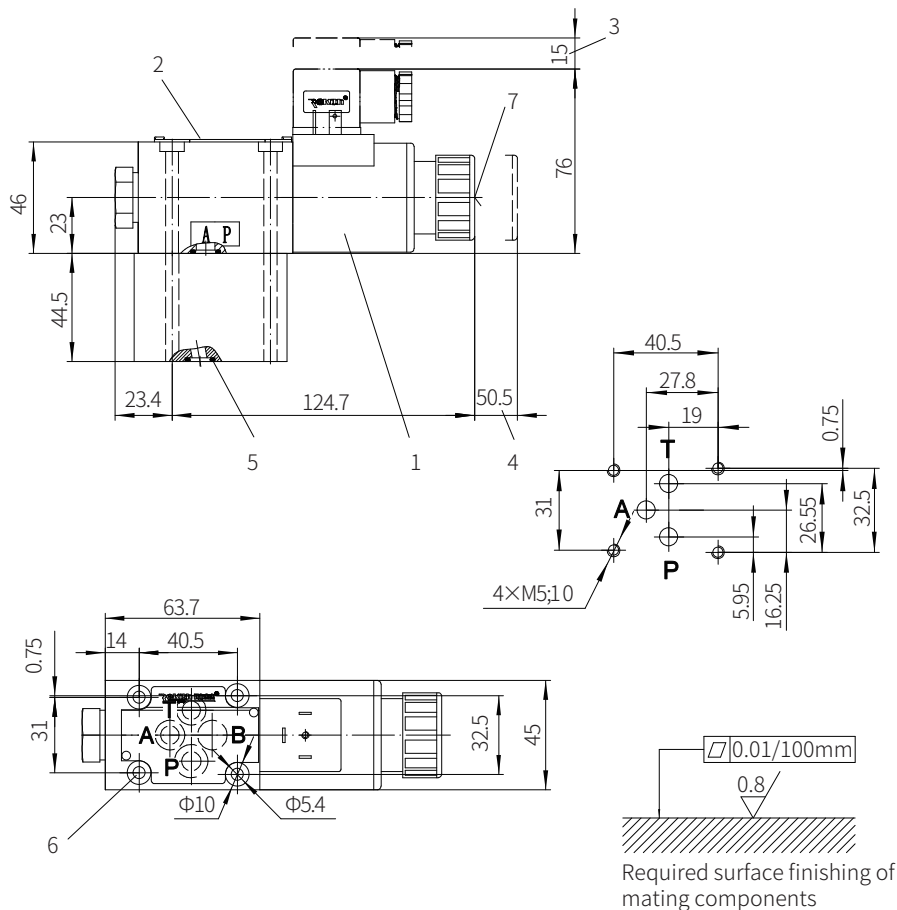
G341/01 (G1/4"); G341/02 (M14×1.5)

G342/01 (G3/8"); G342/02 (M18×1.5)

G502/01 (G1/2"); G502/02 (M22×1.5)

Component size
Size unit: mm

4/2-way poppet directional valve "Y"


 Required surface finishing of
 mating components

- 1 Solenoid
- 2 Name plate
- 3 Space required to remove the plug
- 4 Space required to remove solenoid nut
- 5 O-ring 9.25x1.78 (for oil port P, A, B, T)
O-ring 10x2 (for oil port P)
- 6 Screw connection hole
- 7 Hidden emergency button

Valve fixing screw

M5x90-10.9 grade GB/T70.1-2000

 Tightening torque $M_A = 7.8 \text{ Nm}$

 It must be ordered separately
 if connection subplate is needed.

Subplate model:



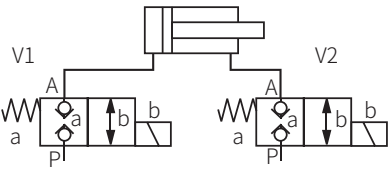


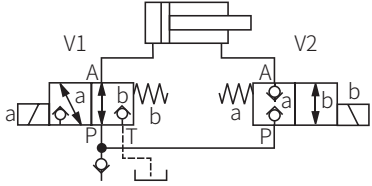
G341/01 (G1/4"); G341/02 (M14×1.5)

G342/01 (G3/8"); G342/02 (M18×1.5)

G502/01 (G1/2"); G502/02 (M22×1.5)

Application examples

These examples only indicate some applications of the poppet valve but not include all functions.

	2/2-way circuit Initial position: The flow is blocked and the pressure is held in the actuator even when the pump is turned off Switching position: The fluid flows freely and the maximum pressure is allowed.		2/2-way circuit Initial position: Lifting The maintenance of position only depends on the stroke limit and the pressure at port P. Switching position: Closed
	2/2-way circuit with two valves Initial position: The piston remains. Switching position: Move in both directions. The direction of movement depends on drives V1 and V2		
	3/2-way circuit Initial position: Side A remains logically closed Switching position: Side B remains logically closed		
Symbol "CK" 	3/2-way circuit Initial position : Port P is closed, there is pressure at A and T, the piston of cylinder 1 moves to the right, and A is unloaded. The piston of cylinder 1 moves to the left. Switching position: Port T is closed, there is pressure at A and P. The piston of cylinder 2 moves to the left, and A is unloaded. The piston of cylinder 2 moves to the right.		
Symbol "2/2" + "UK" 	4/2-way circuit with one 2/2-way and one 3/2-way poppet valve V1 and V2 in the initial position: the piston is blocked externally. V1 and V2 in switching position: the piston moves to the right. V1 in switching position and V2 in the initial position: the piston moves to the left. Both ends of the cylinder are connected with the pump port. Attention! When using single rod cylinders, the performance limit (double flow) of the valve and the maximum permissible working pressure (overpressure) must be taken into account!		